



Input Metered PDU Data Sheet – Edge Series PDU

The ES1326 Edge Series PDU offers energy metering with advanced power and environmental monitoring options. Color coded by branch, the Premium Hydraulic Magnetic Breakers deliver reliability in high temperature environments, with Enlogic's standard low-profile design. The Edge Series PDU offers advanced features, such as color-coded locking IEC outlets, and toolless mounting.

PDU Function

Metering Attributes	Voltage(V), Current(A), Apparent Power(kVA), Real Power(kW), Power Factor, Energy (kWh)
Metering Accuracy	± 1% to ISO/IEC 62052-21
Metering Locations	Input phase and circuit breaker
Remote Outlet Switching	No

Electrical Input

Input Plug Type	IEC 60309 316P6
Acceptable input voltage	200-240VAC, 1ph
Input current (<i>phase</i>)	16A
Input frequency	50/60 Hz
Max Input power	3.68 kVA @ 230 VAC

Electrical Output

Output voltage	230 V
Maximum output current (<i>phase</i>)	16A
Overload protection (<i>internal</i>)	N/A
Outlet configuration	(20)C13, (4)C19

Physical

Chassis Dimensions (L x W x D) mm	1490 x 52 x 53
Depth at circuit breaker, in	N/A
Input cord length, m	3

Environmental

Operating Temperature	-5 to 60°C (23 to 140°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Humidity (operating/storage)	5-90% RH / 5-95% RH; non-condensing
Max operating elevation, above MSL	3,000 m (9,840 ft)

Compliance

Safety & Environmental	CE, Demko Certified to IEC/EN60950-1, RoHS, REACH
------------------------	---


Advanced Network Management Module – Edge Series PDU

Network Connectivity

Network Connectivity	Gigabit Ethernet (10/100/1000 Mbps)
Daisy Chain Cascading	Up to 4 units share a single “daisy-chain” Ethernet connection/IP address
Remote Connectivity	HTTP(s), iPV4 and iPV6, SSH, SNMP (v1, v2c, v3), LDAP(S)
WebUI Interface	Data efficient REACT framework with native mobile device support

Management Module Attributes

Field Replacement	Hot swap replaceable module; fast plug-and-play connectivity
Module Orientation	Electronically rotatable display and 180° mechanical rotation option
User Display	Low-power graphical oLED with user controls for localized information
Security & Sensors	Supports up to 8 digital sensors for environmental sensors and/or electronic locks

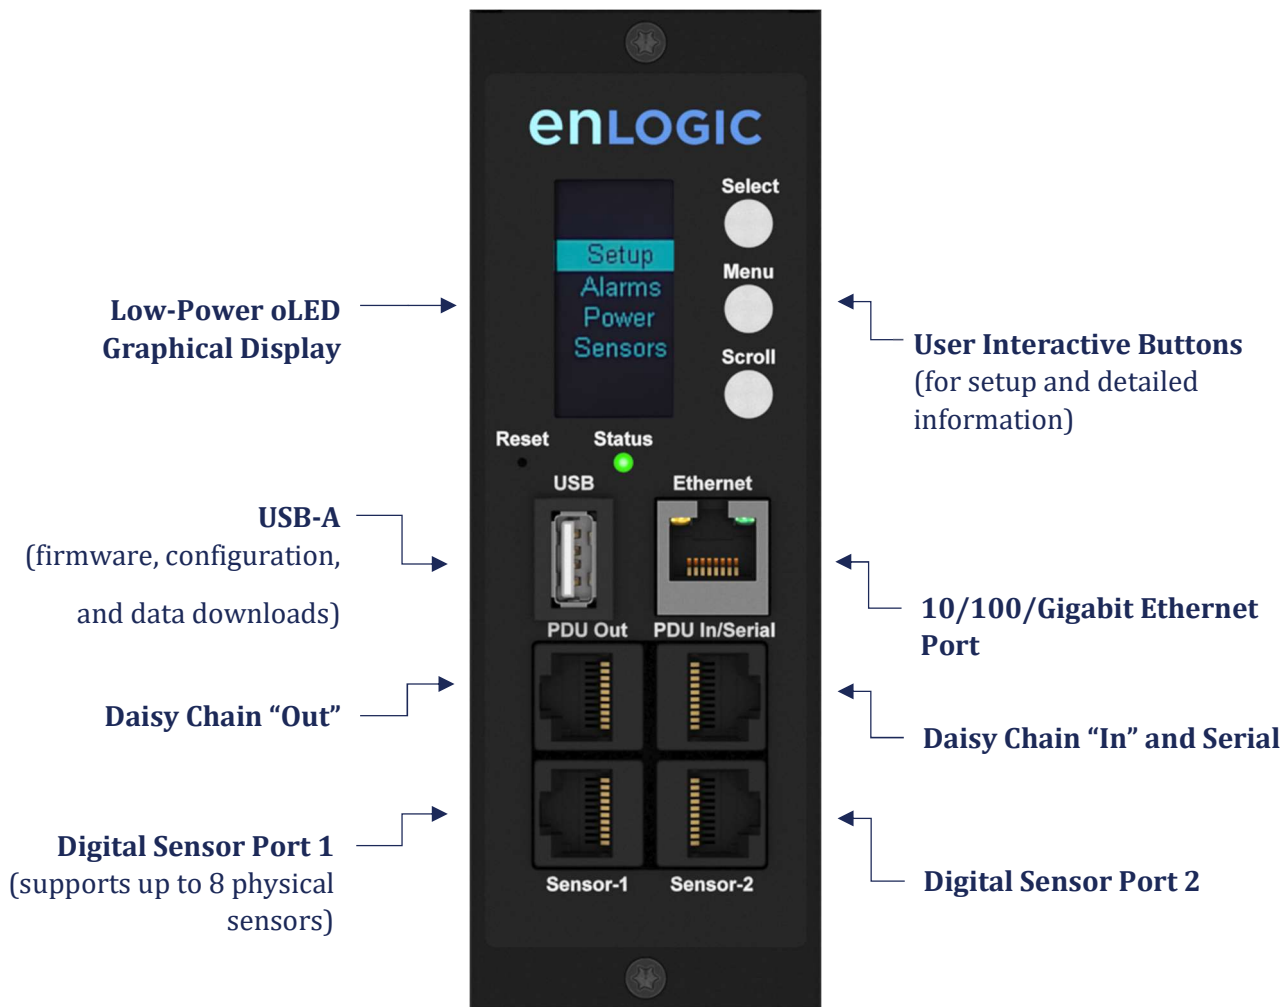

Low-Power oLED Graphical Display

USB-A
 (firmware, configuration, and data downloads)

Daisy Chain "Out"

Digital Sensor Port 1
 (supports up to 8 physical sensors)

User Interactive Buttons
 (for setup and detailed information)

10/100/Gigabit Ethernet Port


Daisy Chain "In" and Serial

Digital Sensor Port 2

Overcurrent Protection

Circuit Breaker Configuration

Circuit Breaker Type	(2) 1-pole, 16A hydraulic-magnetic circuit breakers (temperature stable)
Circuit Interrupt Rating	5,000 Amps (UL489)
Circuit Breaker Trip Curve	Sensata Trip Curve 62/Carling Trip Curve 24
Inrush Pulse Tolerance	10 times rated current (approx.)
Dielectric Strength	3,750 VAC, 60Hz, 60 seconds between all electrically isolated terminals
Vibration	Shall not trip when vibrated to MIL-STD-202, Method 204, Condition A, 100% load
Temperature Rating	-40 to 85°C (-40 to 185°F) Ambient
Handle Off Guard	Yes, protects against accidental user actuation to OFF position

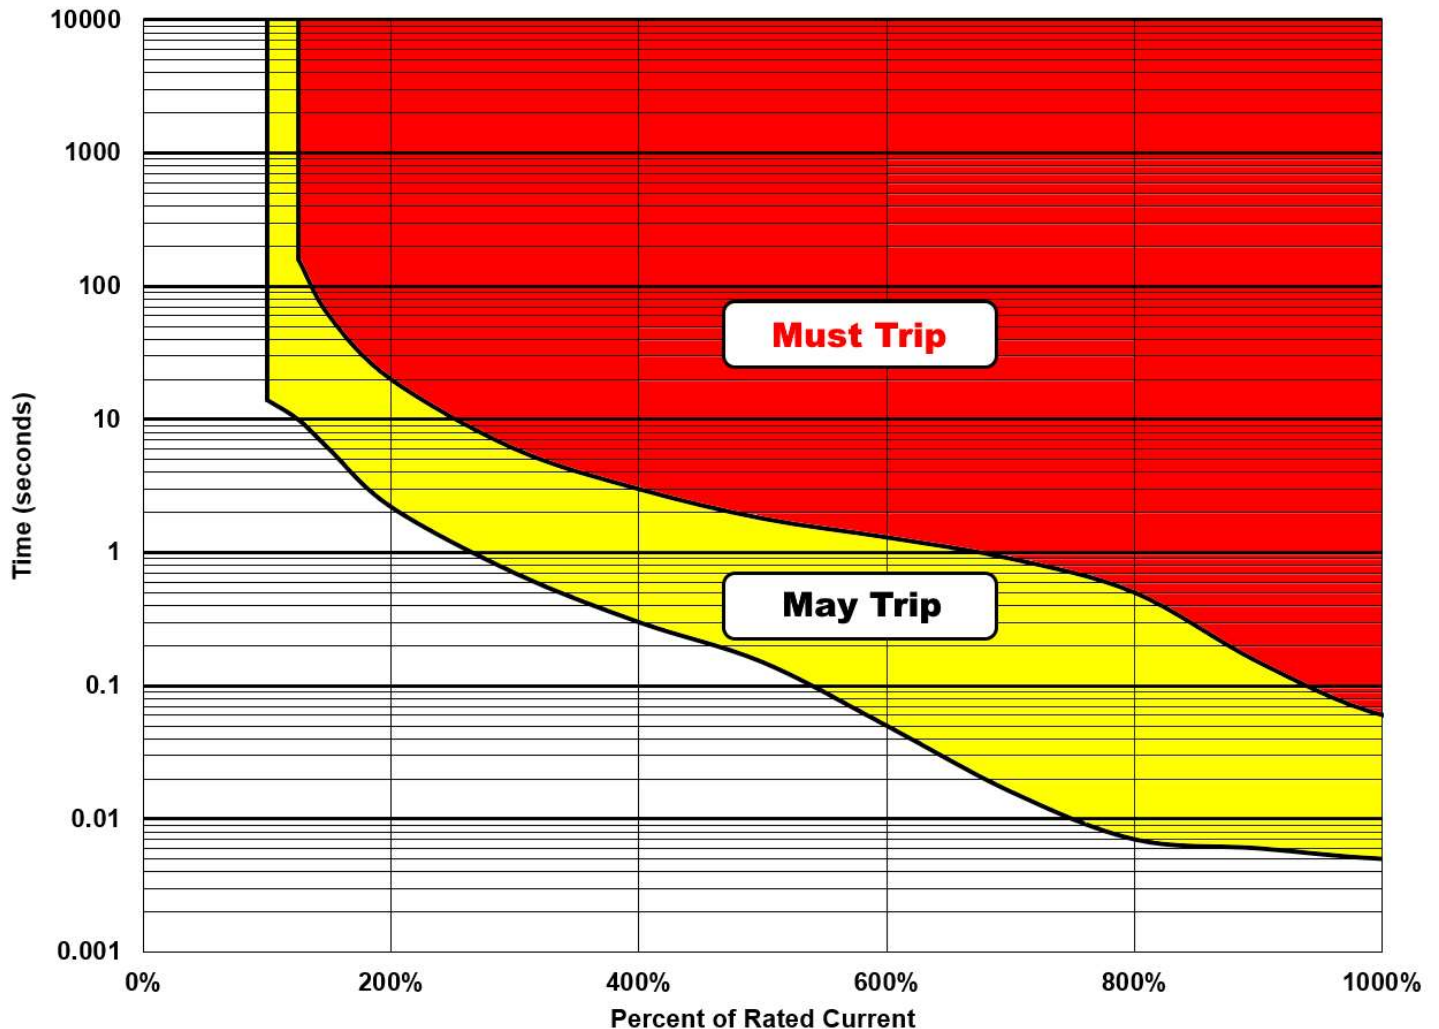

Environmental Sensors

EA9102	Single Temperature Probe
EA9103	Temperature and Humidity Combo Sensor
EA9105	3x Temperature and Humidity Combo Sensor
EA9106	Sensor Input Hub (3 sensors input to PDU)
EA9109	Magnetic Door Switch (open/close)
EA9110	Dry Contact Cable (for third party sensors)
EA9111	Spot Fluid Leak Sensor
EA9112	Rope Fluid Leak Sensor

Warranty and Terms

Warranty

CIS Global warranties Enlogic brand equipment provided shall be free from manufacturing defects for a period of three (3) years from the invoice date to the original purchaser. For full warranty details, please visit www.enlogic.com/warranty.

Disclaimer

Copyright © 2019, CIS Global LLC and/or its affiliates. All rights reserved. This document is provided for information purposes only and current at the time of publishing; the contents hereof are subject to change without notice. This document is not warranted to be error-free, nor subject to any other warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document. This document may not be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without our prior written permission. Enlogic is registered trademark of CIS Global LLC and/or its affiliates.

About CIS

CIS Global has delivered superior product development, manufacturing, and logistics management since 1955 to small and large customers across the globe. We specialize in data center products including mechanical motion and power management solutions. As world market share leader in precision server rails and OEM market share leader in PDUs, CIS designed and built products are found in nearly every data center worldwide.

CIS has more than 20 years' experience manufacturing more than 2-million best-in-class PDUs. CIS acquired Enlogic in 2015 and remains dedicated to providing the industry's most innovative power management solutions build with the highest manufacturing quality.

Americas

USA

+1 (636) 821 5200

AMERsales@cisww.com

Europe/Middle East

UK

+44 (1905) 401700

EMEAsales@cisww.com

Hong Kong

+852 (58) 016700

Asia/Pacific

India

+91 (800) 4430029

APACsales@cisww.com

Taiwan

+886 (801) 491390