

FREEDM™ Breakout Tight Buffer Indoor/Outdoor Cable (2.0 mm) 24F G50 MMF ClearCurve® OM4 2.0mm TB3, Cca-s1b,d0,a1

CORNING

Part Number:
024T6X-32398E2G

Corning LANscape® multipurpose cables can be deployed both indoor and outdoor for campus and building backbone (riser) cabling as well as for the cabling, between floor distributors.

The tight-buffered construction facilitates easier termination for low-fiber-count applications in the local area network (LAN) and eliminates need for fan-out kits.

Features and Benefits

Waterblocking technology

OSP (outdoor) applications

All-dielectric cable construction

Requires no grounding or bonding

UV- and microbe-resistant

Can be installed in ducts or conduits

Dry cable core by means of water-swellable tape and elements

Allows efficient and craft-friendly cable preparation in outdoor or indoor/outdoor applications

Laminated glass yarns

For improved rodent resistance

Small diameter and bend radius


Easy installation in space-constrained areas

TB3 tight-buffered construction

Easy and consistent stripping over 10 cm

Flame retardant

LSZH™/FRNC

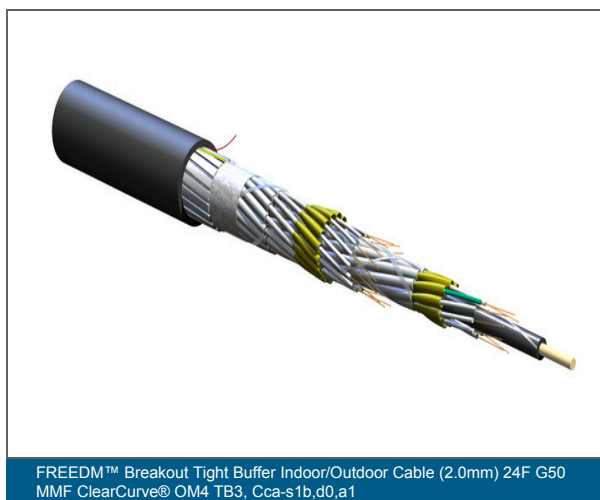

FREEDM™ Breakout Tight Buffer Indoor/Outdoor Cable (2.0 mm) 24F G50 MMF ClearCurve® OM4 2.0mm TB3, Cca-s1b,d0,a1



Specifications

Mechanical Specifications	
Crush resistance	2000 N/10 cm
Fire load	5.7 MJ/m
Max. tensile strength for installation	4000 N
Min. bend radius installation	325 mm
Min. bend radius operation	245 mm
Nominal outer diameter	16.2 mm

Cable Design	
Cable marking	Metre - Handset - CE 17 EN 50575 Cca-s1b,d0,a1 - Sine - CORNING - Fiber Optic Cable - Year - FREEDM(TM) UT-VQ(ZN)H(ZN)BH 24 OM4CC TB 2.0 LSZH(TM)/FRNC
Central element	Dielectric with FRNC/LSZH coating
Fibre count	24
Number of ripcords	1
Buffer tube diameter	900 mm
Outer jacket colour	Black
Buffering diameter	900 µm
Outer jacket material	Flame-retardant, non-corrosive/low-smoke, silicon-free, zero-halogen (FRNC/LSZH) material
Central element diameter	4 mm
Outer jacket nominal thickness	1.2 mm
Tensile strength elements and/or armouring - Layer 1	Laminated glass yarn armour
Fibres per subunit	1
Number of subunits layer 1	9
Number of subunits layer 2	15
Subunit colour	Grey with printed subunit number
Subunit diameter	2 mm
Subunit jacket material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material

FREEDM™ Breakout Tight Buffer Indoor/Outdoor Cable (2.0 mm) 24F G50 MMF ClearCurve® OM4 2.0mm TB3, Cca-s1b,d0,a1



Cable Design	
Subunit jacket nominal thickness	0.35 mm
Subunit tensile strengths elements armouring	Aramid yarn strength members
Tape	Water-swellable
Tight buffer colour subunit, layer 1	Turquoise, white, white, white, white, white, white, white, white
Tight buffer colour subunit, layer 2	15, numbered, white
Tight buffer type	TB3 (easy strip up to 10 cm)
Flame rating	LSZH™/FRNC

Environmental Conditions	
Temperature range, installation	-5 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C
Temperature range, storage	-25 °C to 70 °C

General Specifications	
Environment	Indoor/Outdoor
Cable type	Tight-buffered
Product type	Dielectric armour
Fibre category	50 µm MM (OM4)
Flame rating	LSZH™/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	UT-VQ(ZN)H(ZN)BH
Application	Duct, Vertical Riser, General Purpose Horizontal

Ordering Information	
Product Number	024T6X-32398E2G
EAN Code	4056418784373

FREEDM™ Breakout Tight Buffer Indoor/Outdoor Cable (2.0 mm) 24F G50 MMF ClearCurve® OM4 2.0mm TB3, Cca-s1b,d0,a1



Ordering Information

Maximum delivery length	4000 m
Weight	247 kg/km

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Reaction to fire	Cca, s1, d1, a1

Optical Characteristics

Fibre code	T
Fibre name	G50/125 ULTRA-BEND 7.5
Fibre Type	Multimode
Fibre core diameter	50 µm
Minimum effective modal bandwidth (EMB)	4700 MHz*km / -
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. overfilled launch (OFL) bandwidth	3500 MHz*km / 500 MHz*km
Serial 1 gigabit ethernet	1100 MHz*km / 600 MHz*km
Serial 10 gigabit ethernet	550 MHz*km / -
Typical attenuation	2.4 dB/km / 0.8 dB/km
Wavelengths	850 nm / 1300 nm
Induced Attenuation	For 7.5 mm radius < 0.2 db / -
Fibre category	OM4



Corning Optical Communications GmbH & Co. KG • Lelpziger Strasse 121 • 10117 Berlin, Germany
 +00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2021 Corning Optical Communications. All rights reserved.