

Loose Tube Dielectric Armor Indoor/Outdoor Cable 8x12 G50 MMF ClearCurve® OM3 LT 2.3

CORNING

Part Number:
096TRU-T3188A2G

Corning MPC (multipurpose cable) stranded loose tube cables are flame-retardant, indoor/outdoor cables designed for interbuilding and intrabuilding backbones in duct and riser applications.

The loose tube cable construction, by isolating the fibers from installations and environmental rigors, provides stable and highly reliable transmission parameters. The buffer tubes and fibers in each tube are color coded for quick and easy identification.

The SZ-stranded construction further reduces installation and environmental influences on the transmission parameters and allows mid-span access.

These cables are designed for installation in conduits, ducts and in-house.

Features and Benefits

All-dielectric construction

Requires no grounding or bonding

UV- and microbe-resistant

Can be installed in ducts or conduits

Waterblocking technology

OSP (outdoor) applications

Dry core

Allows efficient and craft-friendly cable preparation in outdoor or indoor/outdoor applications

Laminated glass yarns

Improved rodent resistance

Fibres/buffer tubes colour coded to Telcordia-Bellcore


Easy identification of the individual tubes and fibres

Silicon-free outer jacket

The cable jacket is free of harmful to paint structures

Flame retardant

LSZH™/FRNC

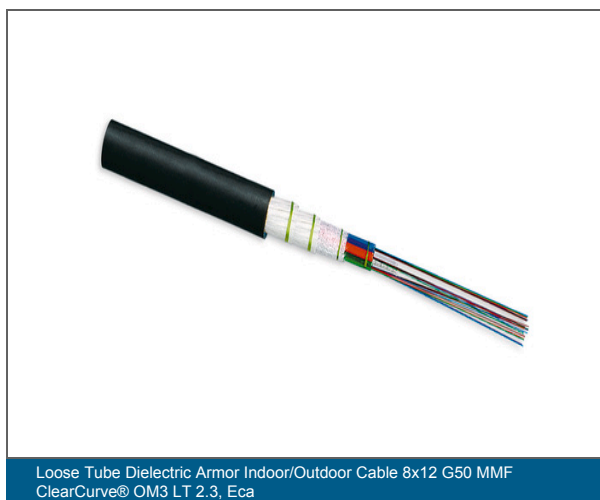

Loose Tube Dielectric Armor Indoor/Outdoor Cable 8x12 G50 MMF ClearCurve® OM3 LT 2.3



Specifications

Mechanical Specifications	
Crush Resistance	2000 N/10 cm
Min. Bend Radius Installation	245 mm
Min. Bend Radius Operation	185 mm
Nominal Outer Diameter	12.3 mm

Cable Design	
Cable Marking	Meter - Handset - CE 17 EN 50575 Eca - Sine - CORNING - Fiber Optic Cable - Year - U-DQ(ZN)BH 96 OM3CC LT 2.3 LSZH(TM)/FRNC
Central Element	Dielectric with FRNC/LSZH coating
Fiber Count	96
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White, Red, Black
Number of Ripcords	1
Outer Jacket Color	Black
Outer Jacket Material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material
Outer Jacket Nominal Thickness	1.5 mm
Tensile Strength Elements and/or Armoring - Layer 1	Laminated glass yarn armor
Buffer Tube Color	Blue, Orange, Green, Brown, Slate, White, Red, Black
Buffer Tube Diameter	2.25 mm
Central Element Diameter	3.9 mm
Number of Active Tubes	8
Number of Tube Positions	8
Tape	Water-swellable
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12

Loose Tube Dielectric Armor Indoor/Outdoor Cable 8x12 G50 MMF ClearCurve® OM3 LT 2.3

CORNING

Environmental Conditions

Temperature Range, Installation	-5 °C to 50 °C
Temperature Range, Operation	-30 °C to 70 °C
Temperature Range, Storage	-40 °C to 70 °C

General Specifications

Environment	Indoor/Outdoor
Cable Type	Loose Tube
Product Type	Dielectric armor
Fiber Category	50 µm MM (OM3)
Flame Rating	LSZH™/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-DQ(ZN)BH
Application	Duct, Vertical Riser, General Purpose Horizontal

Ordering Information

Product Number	096TRU-T3188A2G
EAN Code	4042673385950
Maximum Delivery Length	4000 m
Weight	144 kg/km

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Flame Test Method	Flame retardant according to IEC 60332-1-2 (single cable)Reaction to fire according to EN 50575 and EN 13501-6Low smoke according to IEC 61034 and zero halogen to IEC 60754-1Non-corrosive according to IEC 60754-2
Waterblocking	IEC 60794-1-2 F5
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable)

Loose Tube Dielectric Armor Indoor/Outdoor Cable 8x12 G50 MMF ClearCurve® OM3 LT 2.3

CORNING

Standards

Reaction to fire requirements	Reaction to fire according to EN 50575 and EN 13501-6
Smoke density	Low Smoke to IEC 61034
Halogen content test	Zero Halogen to IEC 60754-1
Level of corrosion	Non-corrosive according to IEC 60754-2
Reaction to fire	Eca

Optical Characteristics

Fiber Code	T
Fiber Name	G50/125 ULTRA-BEND 7.5
Fiber Type	Multimode
Fiber Core Diameter	50 µm
Minimum Effective Modal Bandwidth (EMB)	2000 MHz*km / -
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. Overfilled Launch (OFL) Bandwidth	1500 MHz*km / 500 MHz*km
Serial 1 Gigabit Ethernet	1100 MHz*km / 600 MHz*km
Serial 10 Gigabit Ethernet	300 MHz*km/ 333 MHz*km
Typical Attenuation	2,4 dB/km / 0,8 dB/km
Wavelengths	850 nm / 1300 nm
Induced Attenuation	For 7.5 mm radius < 0.2 db / -
Fiber Category	OM3

Loose Tube Dielectric Armor Indoor/Outdoor Cable 8x12 G50 MMF ClearCurve® OM3 LT 2.3

The logo consists of the word "CORNING" in white, uppercase, sans-serif font, centered within a solid dark blue square.

Corning Optical Communications GmbH & Co. KG • Lelpziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2021 Corning Optical Communications. All rights reserved.