

UniCam® Connector, LC 50 µm multimode (OM3/OM4)

CORNING

Part Number:
95-050-99-X

Corning UniCam® LC connectors offer optical performance in a fast, easy field-termination solution ideal for fiber-to-the-workstation applications where setup and teardown time is critical. The high-precision mechanical splice technology enables fiber optic networks to be installed quickly and cost effectively. Installation of an LC, SC or ST® compatible connector can be accomplished in about 50 seconds to one minute with the UniCam High-Performance Tool Kit.

The lightweight, handheld installation tool and high-performance precision cleaver virtually eliminate human variability during installation, ensuring terminations are right the first time, every time. This kit was designed with consideration for network installers, from the cleaver, with its intuitive, hand-held precision design and dual-clamp precision hold, to the installation tool, with its immediate go/no-go feedback signal indicating proper mating of the field fiber to the fiber stub. Installation is as easy as strip, clean, cleave, cam and crimp, with exceptional optical performance assured. Every UniCam connector is assured to meet the published specification at the time of installation or Corning will replace it.

Features and Benefits

Performance guarantee

100 percent yield guarantee

Broad operating temperature (-40° to +75°C)

Utility and flexibility

Factory-polished end face



Consistent optical performance

Fast termination and no consumables

Low installation cost

Minimum insertion loss

Optimum optical performance

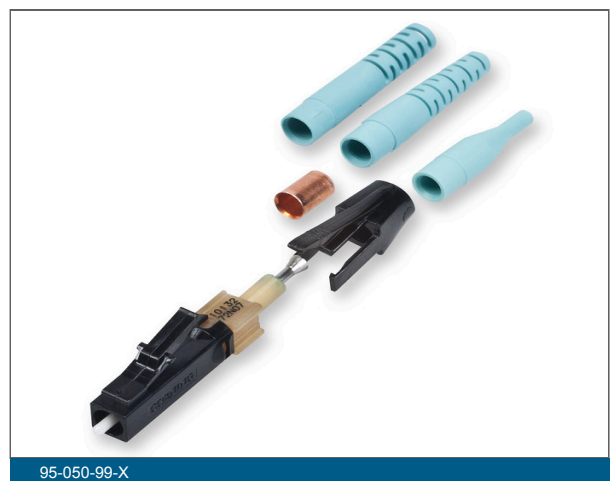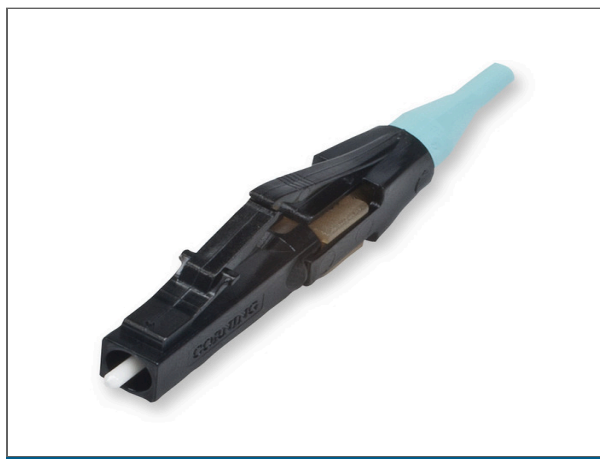

UniCam® Connector, LC 50 µm multimode (OM3/OM4)

CORNING

Specifications

Mechanical Specifications - Connector

Nominal fibre outer diameter	125 µm
Tensile strength jacketed cable	50 N
Durability	≤ 0.2 dB change, 500 rematings, FOTP-21
Tensile strength 900 µm cable	4.9 N (1.1 lb) change ≤ 0.2 dB, FOTP-6

Design - Connector

Connector type	LC
Housing colour	Black
Housing material	Composite
Boot colour	Turquoise
Keyed (security)	No
Pinned	No

Environmental Conditions

Temperature range, operation	-40 °C to 75 °C
------------------------------	-----------------

General Specifications

Product category	Core product / Fastship
Fibre category	50 µm MM (OM3/OM4)
Product type	Field-Installable Connectors
Corning logo	Yes
Keyed (security)	No
Technology	No-epoxy/no-polish

UniCam® Connector, LC 50 µm multimode (OM3/OM4)

CORNING

Optical Specifications - Connector

Polish	UPC
Reflectance	≤ -26 dB
Insertion loss, typical	≤ 0.1 dB

Ordering Information

Product Number	95-050-99-X
EAN Code	4042673619420
Packaging	Individual Pack
Package contents	Connector, Trigger, Crimp Band, Boot (900 µm), Boot (3.0 mm), Boot (2.0 mm)
Units per delivery	1/1

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---



Corning Optical Communications GmbH & Co. KG • Leipzig Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2021 Corning Optical Communications. All rights reserved.