

ATTENUATOR - LC/UPC FEMALE - MALE


Fixed Attenuator family offers high performance of variously fixed attenuation for industrial standard connections. Wide attenuation range, extremely low return loss, polarization insensitive, and excellent repeatability. With our highly integrated design and manufacturing capability, We can also provide customized products to help our customer for better opportunities. Our attenuator complies with industry green initiative such as RoHS.

FEATURES & BENEFITS

- Wide attenuation range
- Low return loss
- Low PDL
- Polarization insensitive
- Various connector type
- Highly reliable

APPLICATIONS

- Optical telecommunication network
- CATV network
- Testing device accessory

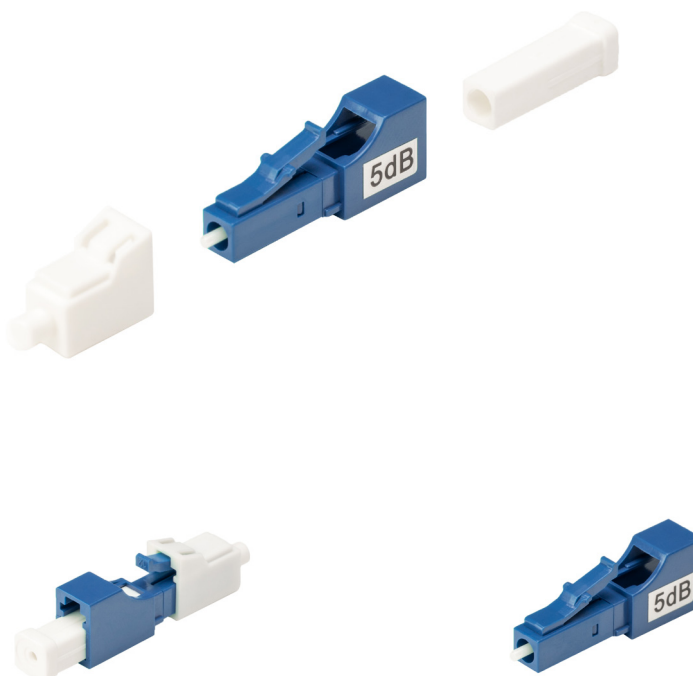

TECHNICAL SPECIFICATIONS		Min	Typical	Max	Unit
Operating Wavelength Range		1240~1650			nm
Return Loss	PC Type	50			db
Operating Temperature		-40		+85	°C
Tolerance		DB≤10 dB-±0.5&DB≥10 dB=±0.75			
Storage Temperature		-40		+85	°C

Part Number Configurator

Attenuator	ATT											
Fibre Type	9											
Connector Type	LCUPC											
DB	1	2	3	4	5	7	8	10	12	15	20	25
Internal Use	A											

Example Part Number ATT9LCUPC3A