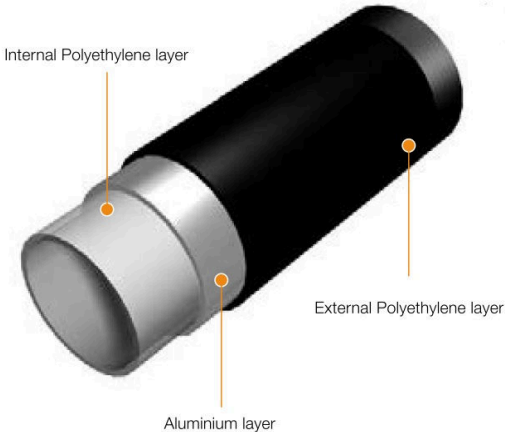


MT Supertube Product Data Sheet

Product Range	22003, 22503, 22010 & 22505	<p>Image for reference only</p> 
Description	LSOH 3-layer heavy gauge Conduit	
Key Features	<p>LSOH Conduit</p> <p>Excellent Screening Performance</p> <p>Suitable for Rail, Marine and Tunnel apps.</p> <p>Supplied in continuous lengths up to 100m</p> <p>Suitable for in-screed applications</p> <p>EMC/EMI Boxes and Fittings</p> <p>Withstands temp. from -45°C to +120°C</p> <p>Compressive strength of 750N</p>	
Dimensions	<p>20mm O.D. (22003 / 22010)</p> <p>25mm O.D. (22503 / 22505)</p>	
Material(s)	LSOH polyethylene (PE-HD) outside and (PE-LLD) inside around an Aluminium core, Both PE grades classified as UL94 HB	
Compliance / Standards(s)	<p>CE & UKCA Marked</p> <p>Low Voltage Directive 2014/35/EU</p> <p>EC Directive 2002/95/EC</p> <p>EC Directive 2004/108/EC</p> <p>The Electrical Equipment (Safety) Regulations 2016</p> <p>BS 7671:2018</p> <p>BS EN 61386-1:2008+A1:2019</p> <p>BS EN 60386-21:2004+A11;2010</p> <p>DIN VDE 0281-13:2003-02 Section 4.3.5</p> <p>DIN EN 50289-1-6:2002-12 Section 6</p> <p>IEC 60227-1:2007-04 Section 2.3.5</p>	
Packaging	Recyclable	

Sustainability

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.

Our PVC-U products are manufactured from an average of 80% recycled plastic, with some extruded products produced from 100% recycled material.

