SEIKOH GIKEN

New Diamond Film

■ Features

- Stable grinding force over use of film life
- Use only purified water
- Designed to provide GR-326 endface geometry
- Lasts 20 times longer compared to previous diamond films
- Easily achieve cost reduction by longer service life

■ Specifications

Product	Diamond polishing film
Application	2.5mm and 1.25mm Zr. Ferrule
Size (Diameter)	127mm, 70mm
Particle size	30um, 9um, 5um, 3um, 1.5um, 1um
Color	Different by particle size (see back page)
Film Life	20 to 40 times
Package	20pcs / set
Storage condition	Temp: 10～30℃ Humid: 30～70%

■ Test Data

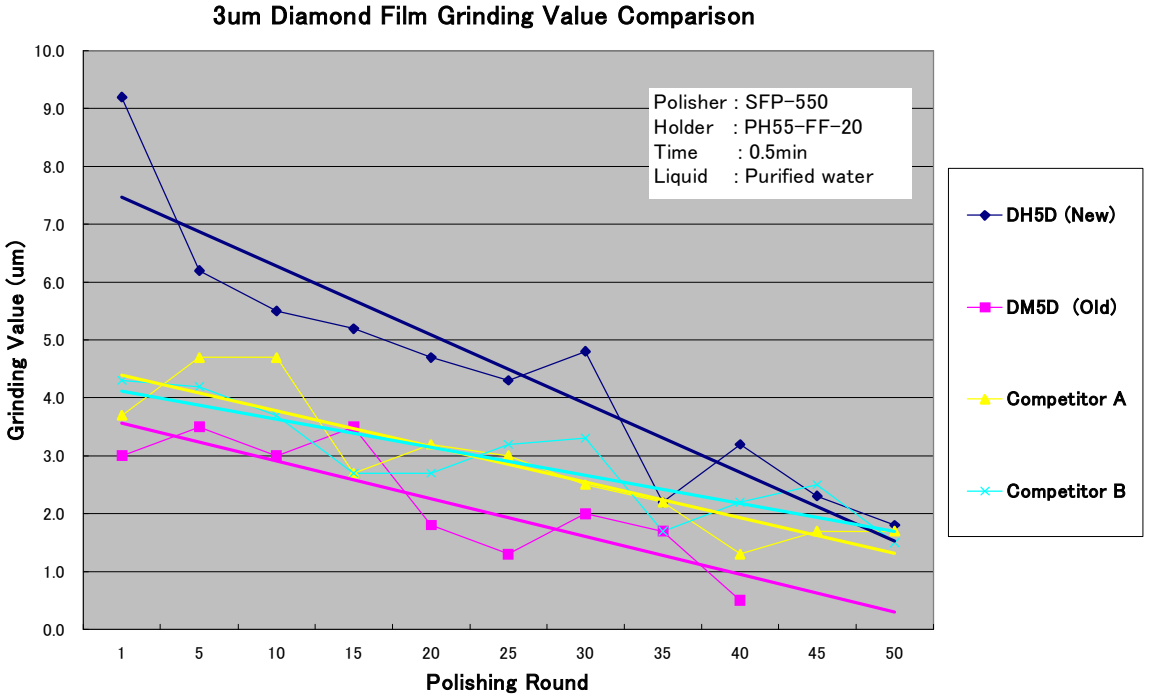

Note: Data in this sheet was under the condition of using SG polishing machine and process.

SG diamond film shows consistent grinding force and film service life over other tested finishing films.

■ Ordering Information

Part Number	Color	Diameter	Particle Size	Sheet / Pack
DA5D	Green	127mm	30um	20
DR5D-9U	Pink	127mm	9um	20
DG5D-5U	Orange	127mm	5um	20
DH5D-3U	Light Yellow Green	127mm	3um	20
DI5D-1.5U	Yellow	127mm	1.5um	20
DJ5D-1U	Lavender	127mm	1um	20
DR07-9U	Pink	70mm	9um	20
DH07-3U	Light Yellow Green	70mm	6um	20
DI07-1.5U	Yellow	70mm	1.5um	20

WORLDWIDE SUBSIDIARIES AND SALES OFFICES:

North America

SEIKOH GIKEN USA, Inc.
Atlanta, Georgia
Tel: +1-770-279-6602
Fax: +1-770-279-8839
sales@sg-usa.com

Europe

SEIKOH GIKEN Europe GmbH
Frankfurt, Germany
Tel: +49-6102-297-701
Fax: +49-6102-297-750
info@sg-euro.de

Asia

SEIKOH GIKEN Co.,Ltd.
Matsudo, Japan
Tel: +81-47-388-3111
Fax: +81-47-388-2009
sales.div@seikoh-giken.co.jp

Seikoh Giken reserves the right to improve, enhance and modify features and specifications of Seikoh Giken products without p rior notifications