


Rittal – The System.

Faster – better – everywhere.



DK 5501.695

Component shelf, static installation

State: 30/09/2022 (Source: rittal.com/uk-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



DK 5501.695 - Component shelf, static installation for VX IT, TS IT, TE, TX CableNet

For static installation between two 482.6 mm (19") mounting levels.

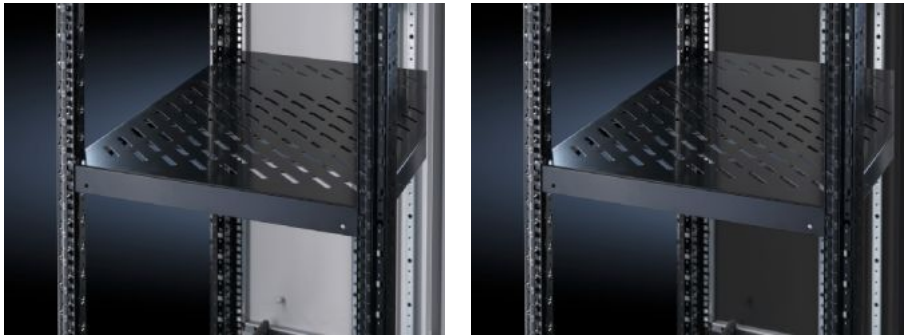

Features

Model No.	DK 5501.695
Benefits	Tool-free, time-saving one-man assembly
Applications	Depth-variable to adapt to individual distances between levels
Material	Sheet steel
Surface finish	Spray-finished
Colour	RAL 9005
Supply includes	Assembly parts
Installation options	482.6 mm (19") L mounting angles, front and rear 482.6 mm (19") mounting frames front and rear
Load capacity	100 kg
Dimensions	Width: 484 mm
To fit	Enclosure type: VX IT TS IT TE
Distance between levels	400 - 600 mm
Packs of	1 pc(s).
Weight/pack	5.5 kg

Features

Copper weight (kg per piece)	0
Customs tariff number	73269098
EAN	4028177679139
ETIM 7.0	EC002620
ECLASS 8.0	27189261

Approvals

Approvals	GOST
-----------	------

Tender text

482.6 mm (19") - component shelf, static installation
Depth-variable perforated component shelf, pull-out,
for L-shaped mounting angles and similar mounting
angle shapes. For static installation between two
482.6 mm (19") mounting levels.

Depth-variable to adapt to individual
distances between levels from 400 to 600 mm.

Tool-free, time-saving one-man assembly from
the enclosure front.

Locate, pull-out, snap into position.

Perforated component shelf surface to support
climate control inside the enclosure.

Load capacity 100 kg. Component shelf height 1 U.

Material: Sheet steel

Surface finish: Spray-finished

Colour: RAL 9005

Model No DK: 5501.695

Manufacturer: Rittal