

QUICK FIT SHELVES

No fixings are needed for Cannon Quick-Fit shelves. They can be fitted and moved within the Cannon cabinet in a matter of seconds. They accommodate the same weight as traditional shelves and do not require the extensive fitting time that is commonly required.

Quick-Fit Fixed Shelves (Patented)

Cannon Quick-Fit Fixed Shelves: One edge hinged relative to the main body of the shelf. Operation of this patented feature with its integral lock, allows fast installation and can be re-configured by unskilled personnel.

These shelves have pre-formed lugs which fit into Cannon standard cut-outs in the depth facing flanges of the 19-inch equipment mounting posts.

The front to back fixing centres of mounting posts on Cannon cabinets is common for all Cannon shelves in each nominal depth, this allows for Quick-Fit and traditional shelves to be mixed as required.

Quick-Fit Shelves are pre-punched with ventilation slots.

Finish: Standard: Powder painted Black RAL9005 or Grey White RAL9002.

Other colours available on request.

Load rating: 50kg max (evenly distributed).



Quick-Fit 2U Modem (Cantilever) Shelves

Cannon QuickFit 2U & 3U Modem Shelves are fitted without cage nuts, screws or cup washers. They are assembled to the cabinet 19-inch equipment mounting posts by the novel use of pre-formed hooks and 1/8 turn Cannon Quick-Fit Buttons.

They can be assembled or re-located in seconds by unskilled labour without the need for specialist tools or screwdrivers.


These shelves occupy 2U OR 3U of front panel space and are available in the same range of depths as the more traditional screw-fixed Cannon Modem Shelves.

Finish: Standard: Powder painted Black RAL9005 or Grey White RAL9002.

Other colours available on request.

Supplied: Complete with two Cannon Quick-Fit Buttons.

Load rating: 15kg max (evenly distributed).

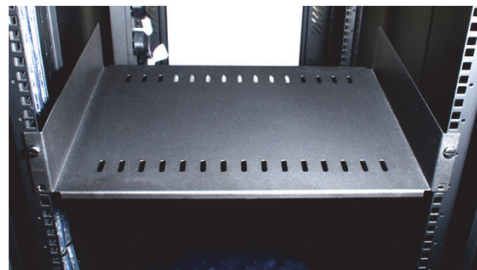

HEIGHT	DEPTH	PART CODE
2U	255mm	701C02602500
2U	350mm	701C02603500
2U	400mm	701C02604000
2U	500mm	701C02605000
3U	450mm	701C03604500

NOMINAL DEPTH	ACTUAL DEPTH	PART CODE	MOUNT CTRS	POST TO POST
350mm	336mm	765B00603500	286mm	366mm
450mm	436mm	765B00604500	386mm	466mm
550mm	536mm	765B00605500	486mm	566mm
600mm	586mm	765B00606000	536mm	616mm
670mm	661mm	765B00606701	606mm	691mm
700mm	686mm	765B00607000	636mm	716mm
770mm	761mm	765B00607701	711mm	791mm
800mm	786mm	765B00608000	736mm	816mm

Size conversions: 1U = 44.45mm = 1 3/4" 600mm = 24" 700mm = 28" 800mm = 32" 1kg = 2.2lbs

QUICK-FIT TELESCOPIC SHELVES (PATENTED)

No more fiddly time consuming effort is required to fit telescopic slide brackets to 19-inch equipment mounting posts with cage nuts, special screws, bar nuts, etc. Instead pre-set brackets which have been factory fitted to the slides, simply clip into the rear and front 19-inch mounting posts.

Cannon Quick-Fit Telescopic Shelves are pre-punched with ventilation slots.

Finish:

Standard: Powder painted Black RAL9005 or Grey White RAL9002.

Other colours available on request.

Slides - Bright zinc plated steel.

Slide brackets - 1.5mm zintec steel .

Load rating: 40kg max (evenly distributed).

Additional benefit: Equipment mounting positions are left free when using the Quick-Fit Telescopic Shelves.

Caution: *The use of heavy loads on telescopic slides may cause the cabinet to become unstable. Therefore the cabinet should either be bolted to the floor or used with a stabiliser bar – SEE SECTION 4.32*

NOMINAL DEPTH	ACTUAL DEPTH	PART CODE
450mm	436mm	775B02604500
550mm	536mm	775B02605500
600mm	586mm	775B02606000
640mm	626mm	775B02606400
700mm	686mm	775B02607000

